



LW35(F)-145 六氟化硫断路器 LW35(F)-145 SF₆ CIRCUIT BREAKER

LW35(F)-145 SF₆ 断路器采用自能式灭弧原理，利用灭弧室内电弧自身的能量在一定时间内熄灭电弧。LW35(F)-145 断路器采用弹簧机构，可实现三相联动，或是分相操作。


产品的设计制造均符合国标及 IEC 相关标准的要求。



- 原理先进，结构紧凑，额定参数高
- 全弹簧操作机构，免维护
- 易安装，噪音低，可靠性高
- 双密封结构，SF₆ 气体年漏气率最小
- 在荷兰 KEMA 通过了全套型式试验

LW35(F)-145 SF₆ circuit breaker is designed with self-energizing theory that the arc generated in the interrupter is distinguished at a specified time with a part of energy from the arc itself. LW35(F)-145 circuit breaker is either three-phase gang operation with a spring mechanism or single-phase operation with three spring mechanisms. The circuit breaker is designed and manufactured in accordance with latest IEC standards.

- Advanced design principle, compactness, high rated parameters
- Maintenance-free and pure-spring drive
- Easy installation, low noise, high reliability
- Double sealing system, minimum SF₆ gas leakage
- Full type test in KEMA, Holland.

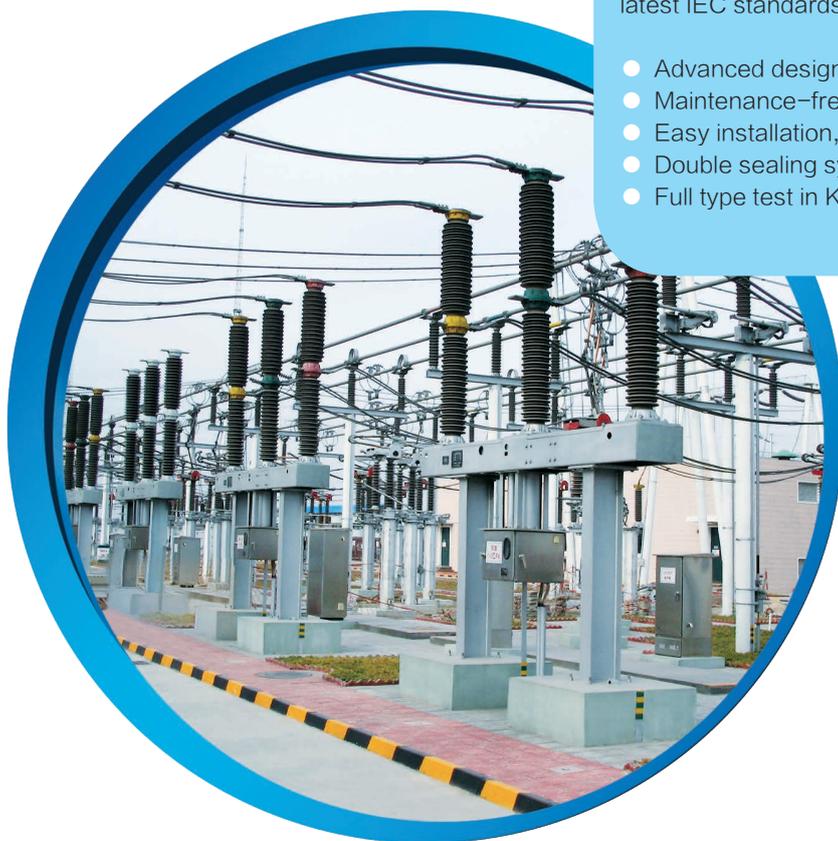

★ 环境条件

- 环境温度：-40℃ ~ +50℃
- 风压：≥ 700pa
- 污秽等级：III, IV 级
- 海拔高度：≤ 3000m(可根据要求调整)

★ Service Conditions

- Ambient temperature: -40℃ ~ +50℃
- Wind pressure: ≥ 700pa
- Pollution level: III, IV
- Altitude: ≤ 3000m(Higher altitudes on request)

主要技术参数 / Main Technical Parameters

项目 Item	单位 Unit	参数值 Data	
额定电压 Rated voltage	kV	145	
操作方式 Operation mode		三相联动 (分相操作) 3-phase gang operation (single-phase operation)	
额定电流 Rated current	A	3150	
额定频率 Rated frequency	Hz	50	
额定短路开断电流 Rated short circuit breaking current	kA	40	
额定短时耐受电流 Rated short time withstand current (3s)	kA	40	
近区故障开断电流 Short line fault breaking current	kA	30/36	
额定峰值耐受电流 Rated peak withstand current	kA	100	
额定失步开断电流 Rated out-of-phase breaking current	kA	10	
额定线路充电开断电流 Rated line charging breaking current	A	50	
额定 SF ₆ 气体压力 (20℃时) Rated SF ₆ gas pressure (at 20℃)	MPa	0.5	
主回路电阻 Main loop resistance	μΩ	≤ 45	
操作顺序 Operation sequence		O-0.3s-CO-180s-CO or O-0.3s-CO-15s-CO	
机械寿命 Mechanical endurance	次 Times	10000	
SF ₆ 气体年漏气率 Annual leakage of SF ₆ gas	%	≤ 1%	
水分含量 (V/V) Moisture content (V/V)	PPm	150/300 (交接值 / 运行值) 150/300 (Pre-delivery/In service)	
爬距 Creepage distance	断口间 Across the open contacts	mm	3950
	对地 To earth	mm	3950
绝缘水平 Insulation Level			
1 分工频耐受电压 (有效值, 干试, 湿试) 1min power frequency withstand voltage (r.m.s)(dry/wet)	相间 / 相对地 Between phases/ phase to earth	kV	275
	断口间 Across the open contacts	kV	315
雷电冲击耐受电压 (峰值) (全波 1.2/50 μs) Lightning impulse withstand voltage (full wave 1.2/50 μs) (peak)	相间 / 相对地 Between phases/ phase to earth	kV	650
	断口间 Across the open contacts	kV	750
SF ₆ 气体零表压时, 5 分工频耐受电压 5min power frequency withstand voltage at 0 MPa SF ₆ pressure	相间 / 相对地 Between phases/ phase to earth	kV	109
	断口间 Across the open contacts	kV	109




主要技术参数 / Main Technical Parameters

项目 Item	单位 Unit	参数值 Data
SF₆ 气体压力 (20℃) 参数 SF₆ Gas Pressure (at 20℃)		
额定工作压力, P _N Rated working pressure, P _N	MPa	0.5 ± 0.015
补气报警压力, P ₁ Pre-filled gas alarming pressure, P ₁	MPa	0.45 ± 0.015
最低功能压力, P ₂ Min. service gas pressure, P ₂	MPa	0.43 ± 0.015
产品包装运输时充气压力, P ₃ Filled pressure for transport, P ₃	MPa	0.025
控制回路参数 Parameters for Control Circuit		
控制回路及信号回路电压 Control and signal circuit voltage	V	DC110/DC220
机电电压 / 功率 / 电流 Motor voltage/power/current	V/W/ A	DC/AC110/750(600)/6.8(5.5) or DC/ AC220/750(600)/3.4(2.7)
加热器电压 / 功率 Heater voltage/ power	V/W	AC220/100
分合闸线圈电压 / 电流 Opening/closing coil voltage/current	V/A	DC110/4.3(5.7), DC220/2.0(3.3) 分闸 opening DC110/4.3(3.3), DC220/2.0 合闸 closing
分合闸线圈电阻 Opening/closing coil resistance	Ω	25.5(15.3) (DC110V), 110(36.7) (DC220) 分闸 opening 25.5(33.3) (DC110V), 110 (DC220) 合闸 closing
额定电压下储能时间 Storage energizing time at rated voltage	s	≤ 15
机械特性参数 Mechanical Parameters		
分闸时间 Opening time	ms	27 ± 3(28 ± 4)
合闸时间 Closing time	ms	100 ± 20(95 ± 15)
合 - 分闸时间 C-O time	ms	≤ 50 (出厂试验时 at routine test), 55 ± 5 (运行时 at service)
分 - 合闸时间 O-C time	ms	≤ 300 (出厂试验时 at routine test), 300 (运行时 at service)
分闸同期 Time interval between opening of first and last phase	ms	≤ 3
合闸同期 Time interval between closing of first and last phase	ms	≤ 5
全开断时间 Breaking time	ms	≤ 60


LW35-145 SF₆ 断路器外形图（三相机械联动）

Outline Drawing Of LW35-145 SF₆ Circuit Breaker (3-phase gang operation)

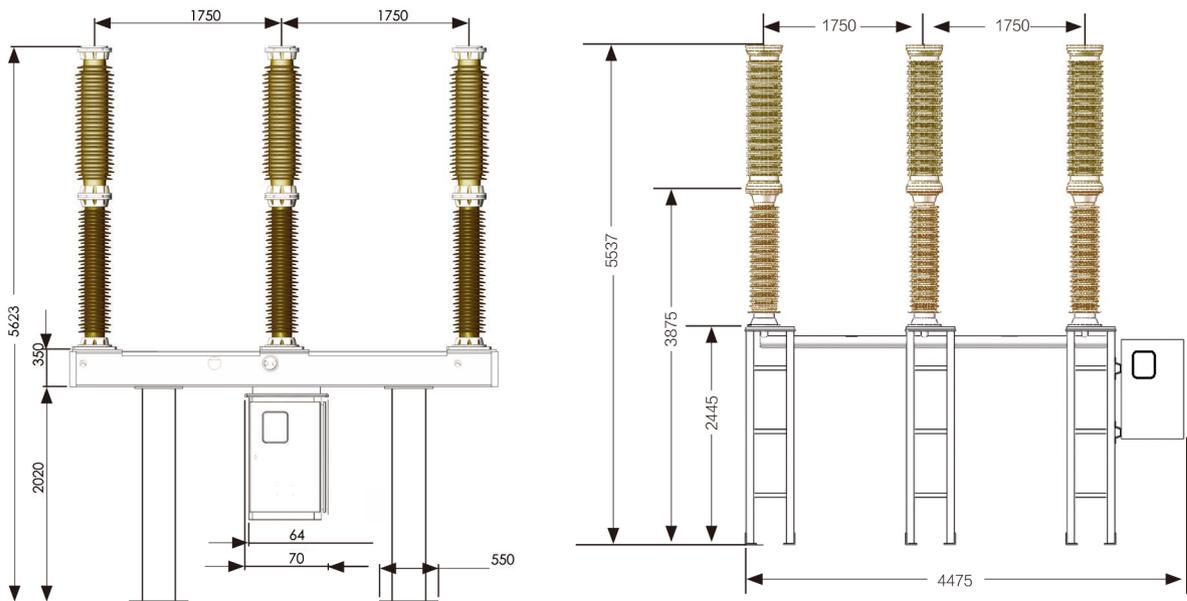

LW35F-145 SF₆ 断路器外形图（分相操作）

Outline Drawing Of LW35F-145 SF₆ Circuit Breaker (single-phase operation)

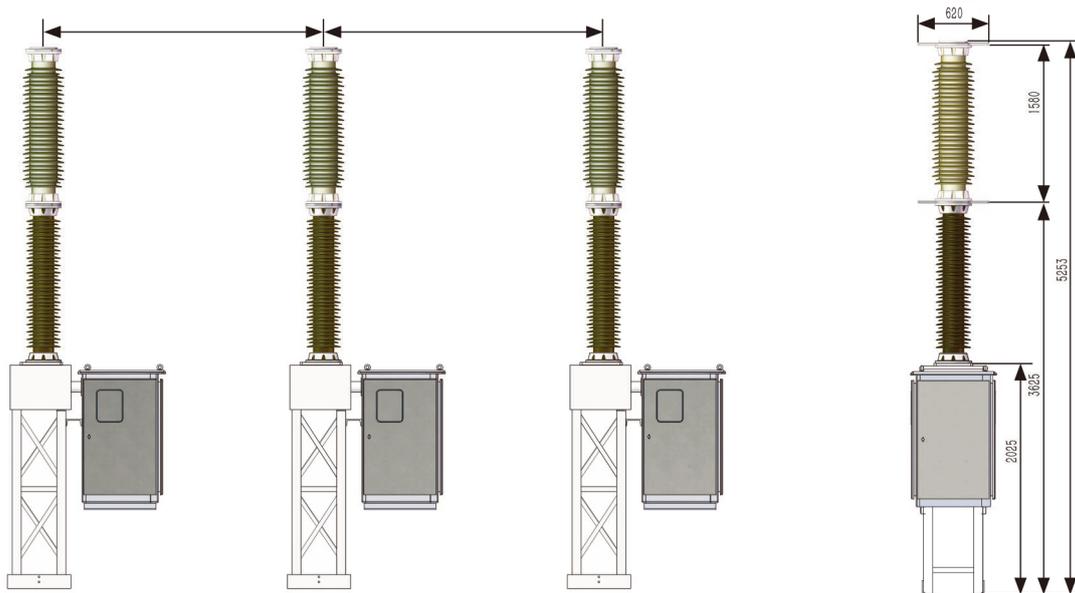

平高集团国际工程有限公司

地址：河南省郑州市郑东新区商都路与康平路交叉口东南角佳田商务中心二期D栋四单元

销售热线：86-371-55008935

售后电话：86-375-2206608

网址：<http://www.pinggaogroup.com>

PingGao Group International Engineering Co., Ltd

Address: Unit 4, building D, phase II, Jiatian business center, southeast corner of the intersection of Shangdu road and Kangping Road, Zhengdong New District, Zhengzhou City, Henan Province

Sales Hotline: 86-371-55008935

After sales Telephone: 86-375-2206608

HTTP: www.pinggaogroup.com